


PLUS NOVELTY

FEEL THE QUALITY

... YOU ARE VALUABLE

MANUFACTURER OF TILLING ACCESSORIES




Using tile levelling system allows a precise levelling of tiles (especially in large-sized ceramics, which is more difficult to even the edges). In addition, it creates a neat and straight grout lines between the tiles. This product can be used for floor ceramics as well as wall ceramics. The tile leveling system is easy DIY for novices to lay professional level tiles. It also interlocks the tiles and therefore gives you a smooth and flat surface after the adhesive dries.

How to use tile leveling system?

1. Start by spreading and combing the mortar based on the manufacturer's instructions. Remove the excess mortar from the edges of the tile and the surface using a trowel.



2. Insert a spacer clip under a tile to achieve a consistent grout joint spacing. Use the table below to calculate the numbers of clips that you need based on the length and width of the tiles being installed.

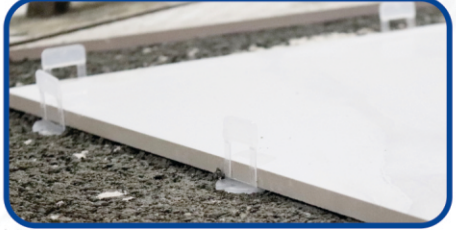

Experientially, you will need to insert one clip in every 20 cm.


3. place the second tile on top and against the clips of the previously installed tile.



4. Insert our reusable flattening wedges into the clips in order to secure, align and flatten adjoining tiles. A special Plier is recommended.



5. After finishing the installation allow the setting materials to cure for the time recommended by the manufacturer.

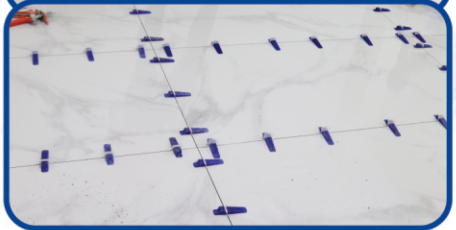

6. Once it's dried kick the clips (not the wedges) with foot or a plastic hammer alongside the grout joints to remove them from the surface.

